


Synthetic API SM Engine Oils, SAE 5W-30 TFOUT Test–ASTM D-4742 (Modified to 190°C)*

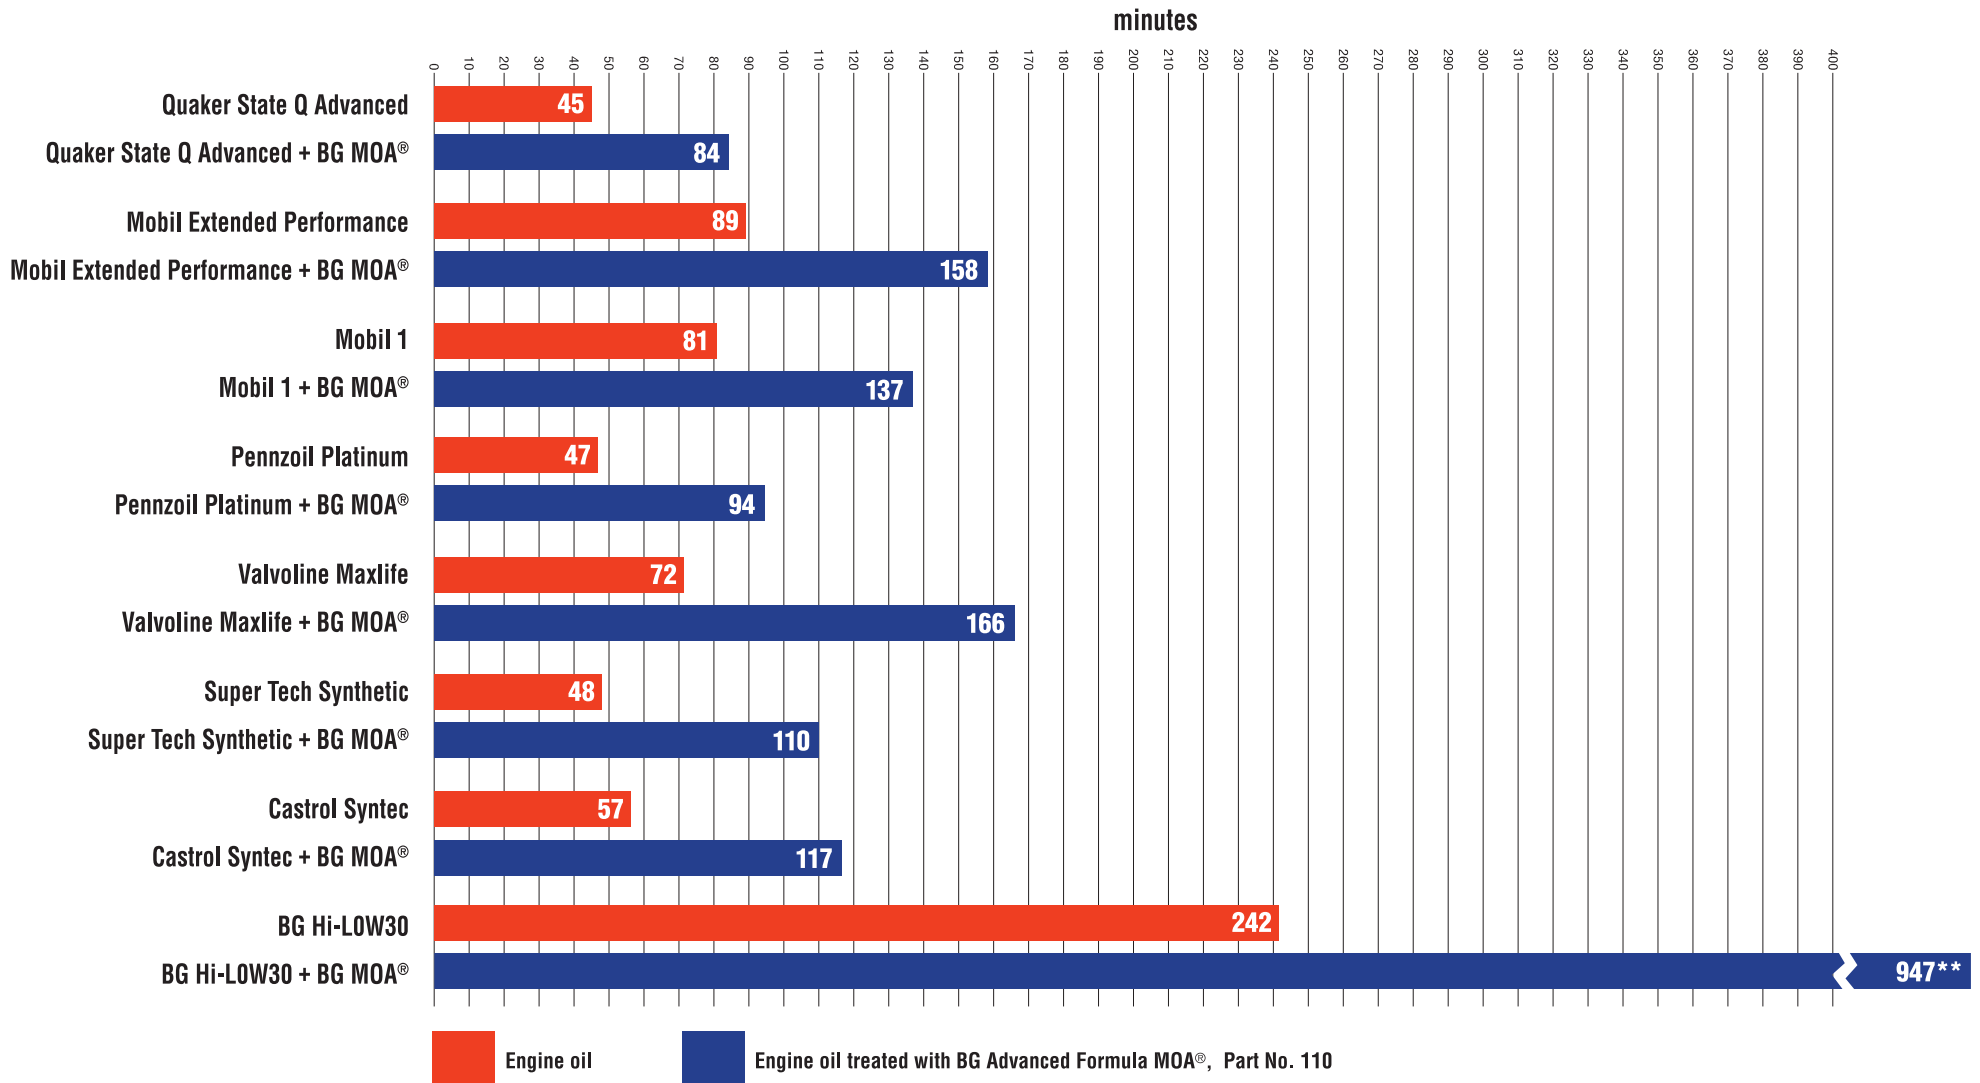

* Test was modified from 160°C to 190°C to increase test severity in order to determine the oxidative limits of the oils. Improved oxidation control was evident with all oils using BG MOA®

** A definitive endpoint for depletion of oxidation protection was not reached. This type of response is most evident in engine oils exhibiting extremely stable anti-oxidant formulations, which can be observed with this blend combination.

ATTENTION. The information contained herein is based on BG Products, Inc. best professional judgment and intended for the use of the individual or entity named on the report. Any dissemination to third parties is unauthorized. If you have received this information in error, please notify us immediately by telephone (1-800-961-6228) and we will arrange for the return of the original paperwork to our office. Any disclosure, copying, distribution or use of the contents is strictly prohibited.